



Remote Emergency Modules



EPACK/LED




EPACK/LED3



EPACK/LED INSTALLED INTO BATTEN




EPACK/LED2 HEAD (CHROME) & EPACK/LED3 HEAD (WHITE)

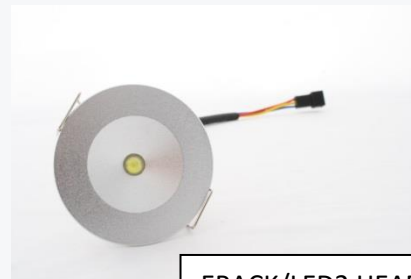

EPACK/LED2 HEAD (CHROME)

Product Code	Description	Cut Out	Lumen Output
EPACK/LED	3w Remote LED non-maintained downlight miniature panel	-	104lm
EPACK/LED1	3w Remote LED non-maintained downlight combined unit	-	104lm
EPACK/LED2	3w Standalone LED non-maintained downlight with satin chrome head	35mm	104lm
EPACK/LED3	3w Standalone LED non-maintained downlight with white head	35mm	104lm
EPACK/LED4	2w Remote LED non-maintained downlight with both white & chrome heads supplied	32mm	70lm
EPACK/LED5	5w Remote LED non-maintained downlight		170lm

Additional Item	Application
F/SOCK	Firesock for use with inverters & batteries
FTB1	3 port fuse block
FTB2	4 port fuse block

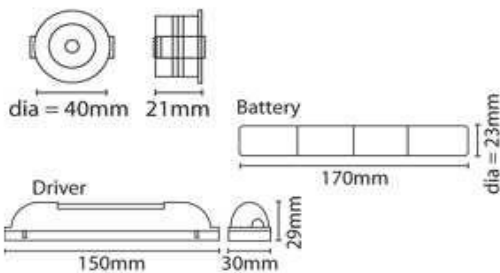

EPACK/LED2 & EPACK/LED3



Rated voltage AC 220V - 240V 50 Hz
 Battery Ni - Cd 4.8v 1.8 Ah
 Operating Environment - 10c - 40c
 Emergency duration > 3 hours
 Recharging time 24 hours
 Complies with all emergency light regulations EN60598-1-1