




## Venus 54

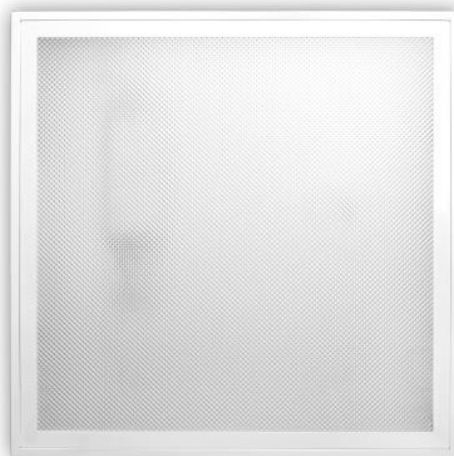

**Venus 54 - High frequency recessed luminaires designed to accommodate T5 fluorescent lamps, IP54 rated. They are suitable for general lighting in retail, commercial, food prep areas and cleanroom applications.**

- 5 year ballast replacement warranty as standard
- Complete IP54 rated Opal or Prismatic Louvre
- Emergency versions available upon request.
- Standard model not suitable for dimming but dimmable versions are available upon request.
- Supplied fitted with European branded control gear.



Product Code	Description	Wattage	Primary Lumen Output	Size	Cut Out
T228PR/54	2x28w T5, recessed 1200x300 prismatic IP54	2x28	5280lm	1195x295x80	1180x280
T254PR/54	2x54w T5, recessed 1200x300 prismatic IP54	2x54	8920lm	1195x295x80	1180x280
T314PR/54	3x14w T5, recessed 600x600 prismatic IP54	3x14	3690lm	595x595x80	580x580
T324PR/54	3x24w T5, recessed 600x600 prismatic IP54	3x24	5250lm	595x595x80	580x580
T328PR/54	3x28w T5, recessed 1200x600 prismatic IP54	3x28	7920lm	1195x595x80	1180x580
T354PR/54	3x54w T5, recessed 1200x600 prismatic IP54	3x54	13380lm	1195x595x80	1180x580
T414PR/54	4x14w T5, recessed 600x600 prismatic IP54	4x14	4920lm	595x595x80	580x580
T424PR/54	4x24w T5, recessed 600x600 prismatic IP54	4x24	7000lm	595x595x80	580x580
T428PR/54	4x28w T5, recessed 1200x600 prismatic IP54	4x28	10560lm	1195x595x80	1180x580
T228OP/54	2x28w T5, recessed 1200x300 Opal IP54	2x28	5280lm	1195x295x80	1180x280
T254OP/54	2x54w T5, recessed 1200x300 Opal IP54	2x54	8920lm	1195x295x80	1180x280
T314OP/54	3x14w T5, recessed 600x600 Opal IP54	3x14	3690lm	595x595x80	580x580
T324OP/54	3x24w T5, recessed 600x600 Opal IP54	3x24	5250lm	595x595x80	580x580
T328OP/54	3x28w T5, recessed 1200x600 Opal IP54	3x28	7920lm	1195x595x80	1180x580
T354OP/54	3x54w T5, recessed 1200x600 Opal IP54	3x54	13380lm	1195x595x80	1180x580
T414OP/54	4x14w T5, recessed 600x600 Opal IP54	4x14	4920lm	595x595x80	580x580
T424OP/54	4x24w T5, recessed 600x600 Opal IP54	4x24	7000lm	595x595x80	580x580
T428OP/54	4x28w T5, recessed 1200x600 Opal IP54	4x28	10560lm	1195x595x80	1180x580

- Supplied Less lamps – Requires T5 lamps
- Lumen outputs are approximate and subject to change

Add to end of Product Code	Application
/D	1-10v Analogue Dimmable
/DD	DSI/Push Dim
/DALI	DALI Dimmable
/M3	3 Hour Emergency
Additional Item	Application
C/CLIPS	Mounting clips for plasterboard mounting



For more information on our Tegral brand of products, please contact us

Tegral Lighting Ltd  
Unit 4 Myson Way  
Raynham Road Industrial Estate  
Bishops Stortford  
Herts, CM23 5JZ

Integral Lighting Ltd  
Unit 99 Barrow Road  
Dublin Ind Est  
Glasnevin, Dublin 11



# Tegral

Quality Lighting

**E-mail:** [salesuk@tegral-lighting.com](mailto:salesuk@tegral-lighting.com)  
**Tel:** +44 (0)1279 461888/908  
**Fax:** +44 (0)1279 460115

**E-mail:** [sales@tegral-lighting.com](mailto:sales@tegral-lighting.com)  
**Tel:** +353 (01) 8309684/85/86  
**Fax:** +353 (01) 8309932

[www.tegral-lighting.com](http://www.tegral-lighting.com)